


MDT Push Button Lite 55 1/2/4-fold

| Version | | |
|---------------|---------------------|---|
| BE-TAL5501.01 | Push Button Lite 55 | 1-fold, White glossy finish, Version NEUTRAL |
| BE-TAL55T1.01 | Push Button Lite 55 | 1-fold, White glossy finish, Version NEUTRAL, with temperature sensor |
| BE-TAL5501.A1 | Push Button Lite 55 | 1-fold, White glossy finish, Version UP/DOWN symbol |
| BE-TAL5501.B1 | Push Button Lite 55 | 1-fold, White glossy finish, Version I/O symbol |
| BE-TAL55T1.B1 | Push Button Lite 55 | 1-fold, White glossy finish, Version I/O symbol, with temperature sensor |
| | | |
| BE-TAL5502.01 | Push Button Lite 55 | 2-fold, White glossy finish, Version NEUTRAL |
| BE-TAL55T2.01 | Push Button Lite 55 | 2-fold, White glossy finish, Version NEUTRAL, with temperature sensor |
| BE-TAL5502.A1 | Push Button Lite 55 | 2-fold, White glossy finish, Version UP/DOWN symbol |
| BE-TAL5502.B1 | Push Button Lite 55 | 2-fold, White glossy finish, Version I/O symbol |
| BE-TAL55T2.B1 | Push Button Lite 55 | 2-fold, White glossy finish, Version I/O symbol, with temperature sensor |
| BE-TAL5502.C1 | Push Button Lite 55 | 2-fold, White glossy finish, Version UP/DOWN and I/O symbol |
| BE-TAL55T2.C1 | Push Button Lite 55 | 2-fold, White glossy finish, Version UP/DOWN and I/O symbol, temperature sensor |
| BE-TAL5502.D1 | Push Button Lite 55 | 2-fold, White glossy finish, Version I/O and UP/DOWN symbol |
| BE-TAL55T2.D1 | Push Button Lite 55 | 2-fold, White glossy finish, Version I/O and UP/DOWN symbol, temperature sensor |
| | | |
| BE-TAL5504.01 | Push Button 55 | 4-fold, White glossy finish, Version NEUTRAL |
| BE-TAL55T4.01 | Push Button 55 | 4-fold, White glossy finish, Version NEUTRAL, with temperature sensor |

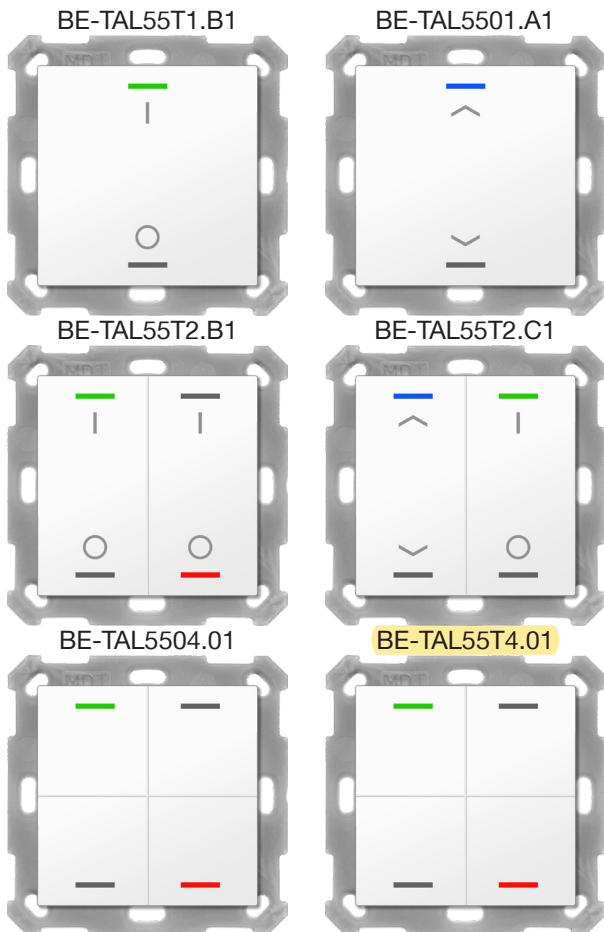

- Production in Germany, certified according to ISO 9001
- Fits 55mm systems/ranges
- **New multi touch function, sends up to 4 values/DPTs on the same or different objects**
- **Innovative group control with long/extra long button press**
- Push Buttons can be programmed for 1 or 2 button operation
- 1 and 2 button operation for switching, dimming, shutters, values
- Changing of values/scenes with up to 4 values
- Short/long button push and 2 objects
- **Two RGBW Status LED per button pair**
- **LED brightness controllable via day/night or brightness object**
- 4 logic blocks
- Integrated bus coupling unit
- 3 years warranty

The MDT Push Button Lite 55 releases KNX telegrams depending on the parameterization after pressing the buttons. The push buttons can be programmed for 1 or 2 button operation (BE-TAL55x4.01: 4 single buttons). The RGBW status LEDs can be controlled with internal or external objects. The LED brightness is controllable via day/night or brightness object.

In addition to switching, dimming, blinds, scenes or sending values, a lot more functions are available. The Push Button Lite 55 has 4 integrated logic blocks.

The Push Button Lite 55 has an innovative group function with long/extra long button press. For example, with a long press of a button, a shutter can move normally UP and DOWN, while the extra long button press moves the entire blind group of the room.

With the new multi touch function up to 4 values/datapoints can be send to one ore more objects. With a single button different light groups can be switched, e.g. 1 x tap is ceiling light, 2 x tap is wall light etc.

The Push Button Lite 55 is a flush mounted device for fixed installations in dry rooms. For project design and commissioning of the MDT Push Button Lite 55 it is recommended to use the ETS. Please download the application software at www.mdt.de/downloads.html

| Technical Data | BE-TAL5501.x1 BE-TAL5502.x1 BE-TAL5504.01 | BE-TAL55T1.x1 BE-TAL55T2.x1 BE-TAL55T4.01 | |
|---|---|---|--|
| Number of push button pairs/ push buttons | 1/2 2/4 4 single buttons | 1/2 2/4 4 single buttons | |
| Measurement range temperature | -- | 0 to + 40°C | |
| Specification KNX interface | TP-256 | TP-256 | |
| Available application software | ETS 4/5 | ETS 4/5 | |
| Permitted wire gauge | | | |
| KNX busconnection terminal | 0,8mm Ø, solid core | 0,8mm Ø, solid core | |
| Power supply | KNX Bus | KNX Bus | |
| Power consumption KNX bus typ. | < 0,5W | < 0,5W | |
| Operation temperature range | 0 to + 45°C | 0 to + 45°C | |
| Enclosure | IP 20 | IP 20 | |
| Dimensions (W x H x D) | 55mm x 55mm x 25mm | 55mm x 55mm x 25mm | |

Exemplary circuit diagram BE-TAL55xx.xx

